REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

注意事項	
1	包裝方式:500/包



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



RECOMMENDED
MOUNTING HOLE
(建議架設孔)

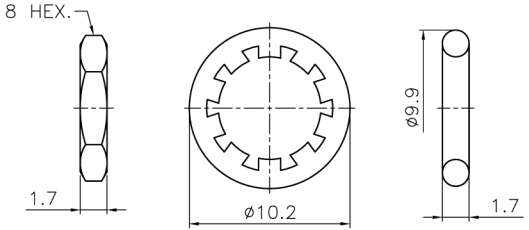

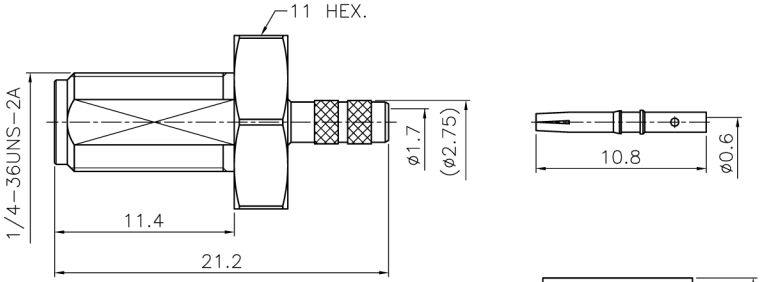

TYPICAL SPECIFICATIONS

1.0. ELECTRICAL
- 1.1. FREQUENCY RANGE: DC-6 GHz
- 1.2. NOMINAL IMPEDANCE: 50 OHM
- 1.3. WORKING VOLTAGE: 250 VOLTS MAX.
- 1.4. PROOF VOLTAGE: 750 VOLTS
- 1.5. VSWR: 1.3 MAX. @ 1 GHz

2.0. MATERIALS
- 2.1. BODIES: BRASS PER JIS-C3604
- 2.2. CENTER CONTACT: BRASS PER JIS-C3604
- 2.3. INSULATION: PTFE PER ASTM D1457 AND ASTM D1710
- 2.4. FERRULE: BRASS PER JIS-C2700

3.0. ENVIRONMENTAL
- 3.1. OPERATING TEMPERATURE RANGE: -65° C TO +165° C

1. CRIMPED FERRULE
   HEX. CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS=3.2mm

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	HEX NUT	BRASS	GOLD	1	HN8-1/4-36X17G
6	WASHER	BRASS	GOLD	1	WS-102/65X05BG
5	O-RING	SILICONE	RED	1	GS-99/65X17RS
4	FERRULE	BRASS	GOLD	1	FR-39/32X95G
3	CONTACT PIN	BRASS	GOLD	1	SMA6421E5-3-127/06G
2	INSULATOR	PTFE	WHITE	1	SMA1121A5-2T-50
1	BARREL	BRASS	GOLD	1	SMA6421D5-1-275/17G

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
ANGLES = ±3°	
UP TO 6 = ±0.1	
6-40 = ±0.2	
40-120 = ±0.6	
120-315 = ±1	
ABOVE 315 = ±1.6	
SCALE/比例	3/1
DATE/時間	05-20-12'

APPROVED/核准	MARK
CHECKED/檢查	MARK
DRAWN/繪圖	MARK
FILE NO. F:\CAD\SMA\6421D5\50\GTG-174U-A#	

JAW Dropper
Innovation Channel Co.,Ltd.

TITLE/品名	SMA STR BULKHEAD JACK (RG-174/U,316/U,LMR-100)	
DRAWING NO./圖號	SMA6421D5-GTG-174U-50	REV A
CUSTOMER NO./客戶編號		REV