
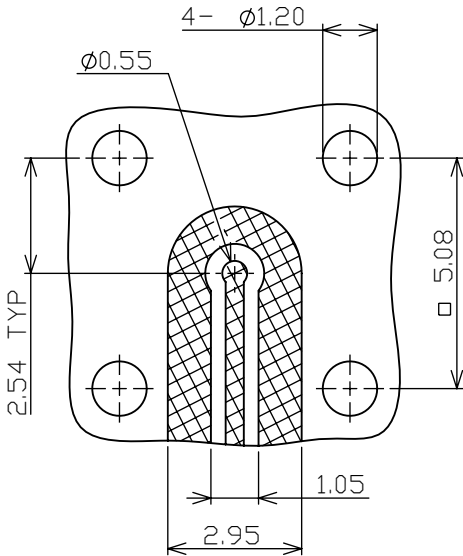
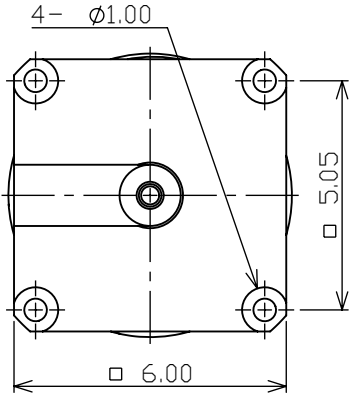



NO	DESCRIPTION	MATERIAL	FINISH	QTY
1	Body	Brass	Gold	1
2	Contact Pin	BeCu	Gold	1
3	Insulator	PEEK	--	1

Specification

Impedance : 50 Ohm
 Frequency Range : DC to 40 GHz
 Working Voltage : 250 Vrms
 Dielectric Withstanding Voltage : 1,000 Vrms
 Insulation Resistance : 5,000 M-Ohm
 Temperature Rating : -65° C to 165° C

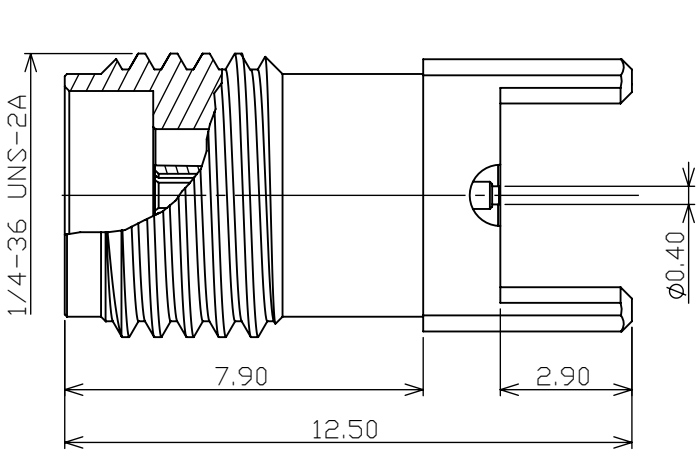

RMD PCB Layout
 NOTE: THIS PATTERN IS FOR REFERENCE ONLY.
 PATTERN MAY VARY DEPENDING ON ASSEMBLY
 PROCESS, BOARD TYPE, OR SPECIFIC ELECTRICAL OR
 MECHANICAL REQUIREMENTS.



DESCRIPTION 2.92mm (K Band) Jack PCB Mount Receptacle, Surface Mount	RoHS COMPLIANT		UNIT mm COMMON TOLERANCE ±0.15 ±3.0° ANGLES WEIGHT: 1.61 g	 Innovation Channel Co.,Ltd. ITEM NO KJ-05-BK-01-Au
	SCALE	6:1		
	DATE	2026/02/10		
	DESIGNED			
	CHECKER			
	APPROVED			