



NO	DESCRIPTION	MATERIAL	FINISH	QTY
1	Nut	Brass	Gold	1
2	Teeth Washer	Brass	Gold	1
3	Body	Brass	Gold	1
4	Insulator	PTFE	--	1
5	Contact Pin	Brass	Gold	1
6	Body	Brass	Gold	1
7	Insulator	PTFE	--	1

Specification







Impedance : 50 Ohm
Frequency Range : DC to 4 GHz
Working Voltage :335 Vrms
Dielectric Withstanding Voltage : 1,000 Vrms
Insulation Resistance : 1,000 M-Ohm
Temperature Rating : -65° C to 165° C

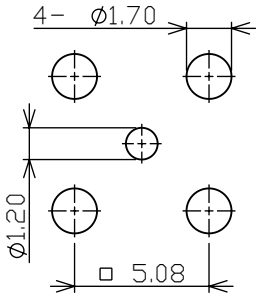

RMD PCB Mounting Hole



RMD Mounting Hole

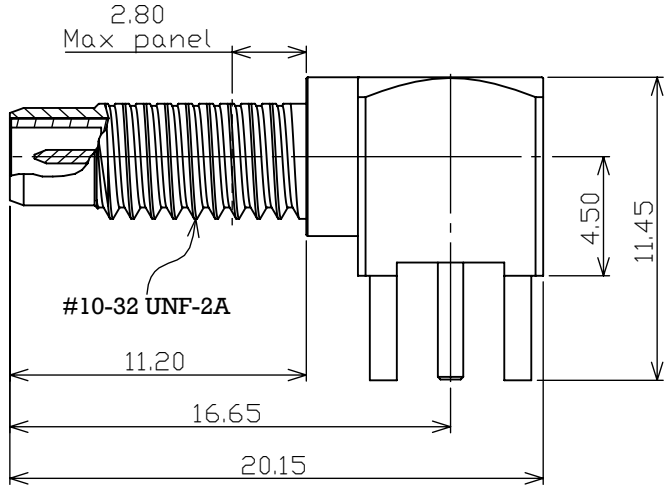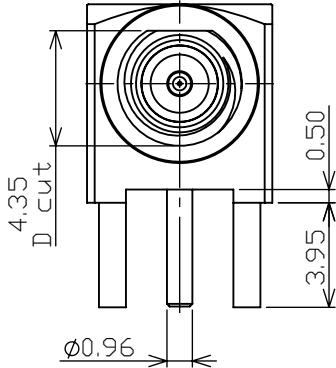

SMC Jack (Male Pin) R/A
PCB Mount Receptacle,
B/H Rear Mount

RoHS COMPLIANT	
SCALE	3.5:1
DATE	2025/02/19
DESIGNED	
CHECKER	
APPROVED	

UNIT	mm
COMMON TOLERANCE	±0.15
ANGLES	±3.0°
WEIGHT:	4.28 g

J&W Dropper
Innovation Channel Co.,Ltd.

ITEM NO

SMCJ-06AL-BT-01-Au